

Height Safety Products

HARNESSES

EN 361
EN 358



OCCASIONAL USE



REGULAR USE



INTENSIVE USE

CONNECTIONS

EN 362



PERMANENT



FREQUENT



WIDE-OPENING



TUBULAR

SYSTEMS

EN 353-2
EN 360
EN 355
EN 354
EN 341
EN 358



RESTRAINED LANYARD



FALL ARREST LANYARD



EVACUATOR



SELF-RETRACTING FALL ARRESTER



FALL ARRESTER ON ROPE

TEMPORARY ANCHOR SYSTEMS

Lifelines and anchors EN 795

TEMPO II

Webbing - type temporary lifeline. For installations of 1 to 18 metres. Designed for 2 users.

TEMPO III

Braided rope type temporary lifeline. For installations of 1 to 18 metres. Designed for 3 users.

TIRSAFE™

Simple, quick to install temporary lifeline. Cable length of 2 to 20 metres. Designed for 3 users.

MOBIFOR

Deadweight-type anchor for roof, terrace... Designed for 1 user.

TRACPODE

Tripod equipped with a blocfor™ R self-retracting fall arrester with carol™ winch. Designed for 1 user.



ANCHORS / LIFELINES


PERMANENT

EN 795
EN 353-1
EN 353-2



TEMPORARY

EN 795

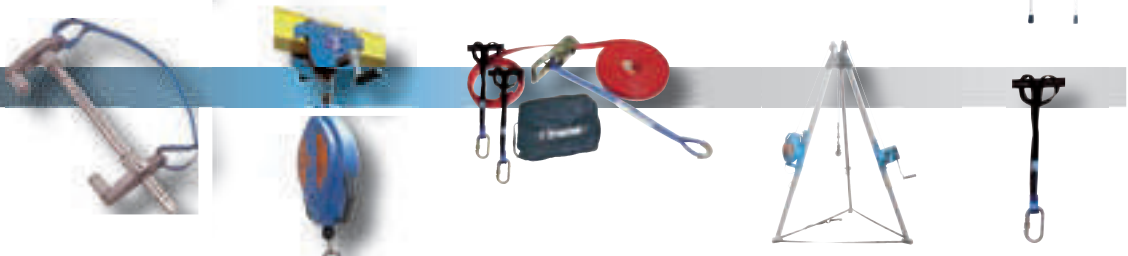

PERMANENT ANCHORING SYSTEMS

Horizontal lifelines and anchors EN795

TRAVSAFE™



Total freedom of lifeline routing.
Anchors pass automatically
Users can move and work on both sides of the lifeline
Can be used by up to 5 users.

TRAVFLEX™



Solution for limited strength structures and steel roof deck sections.
Anchors pass automatically
Users can move and work on both sides of the lifeline
Can be used by up to 3 users.

TRAVSMART

Designed for installation under ceiling, on wall, inclined surfaces, ground or post.
Anchors pass automatically
Users can move and work on both sides of the lifeline.
Monocable system
Quick and easy to install
Can be used by up to 5 users.

TRAVSPRING™



Proximity lifeline.
Intermediate anchors are passed manually.
Monocable system, easy and quick to install.
Can be used by up to 5 users.

FABA™ AW1


Horizontal fall arrest rail system.
Can be connected with a vertical ladder.

PA

Aluminum anchor point
Can be mounted to concrete or steel.

RINGSAFE

Stainless steel anchor point.
Built-in fall indicator.

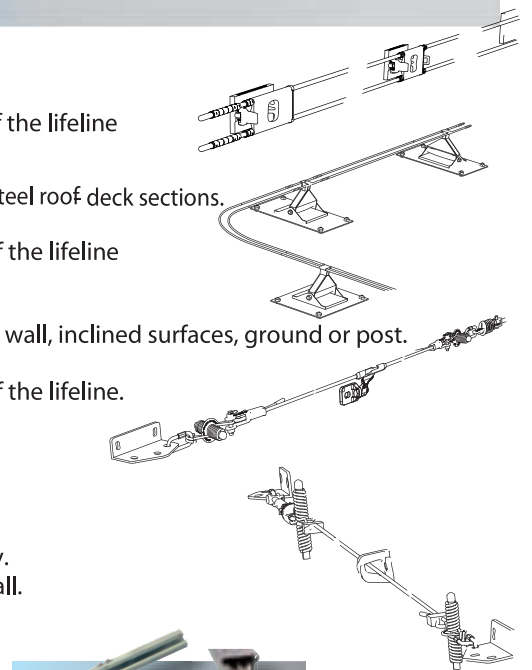

Vertical lifelines and rails EN353-1 and 2

STOPCABLE™

Cabletype vertical lifeline.
Mounted on ladder.
Unlimited length.
Designed for 1 user.

FABA™ A12

Vertical fall arrest rail system.
Rail only or rail integrated on ladder.
Galvanised steel or stainless steel.

FABA™ AL2

Vertical fall arrest rail system.
Rail only or rail integrated on ladder.
Anodised aluminium

