

Lifting Bag - CLC Series


Low Pressure (1bar)

- Lifting loads till 12 t (13.2 US tons) at 1000 mm height (40" lift height)
- As pneumatic jacks, PRONAL CLC can be used for application with moderate loads and requiring high lift, such as cars, trucks, farm machinery, and even small aircraft.
- The CLC lifting bags are ideal for many rescue and recovery operations.
- Cylindrical in shape, they are very stable when fully inflated.
- Lifting height up to 1000 mm / 40"
- Insertion height of less than 50 mm / 2"



Size	Max Lift Cap. (T)	Dimensions (mm)	Thickness (mm)	Wt. (kg)	Max Lifting Height. (mm)	Air Capacity (l)
3T	3	610	50	3	430	266
5T	5	760	50	4	590	570
7T	7	910	70	7	610	840
12T	12	1220	100	13	1000	2475

Accessories

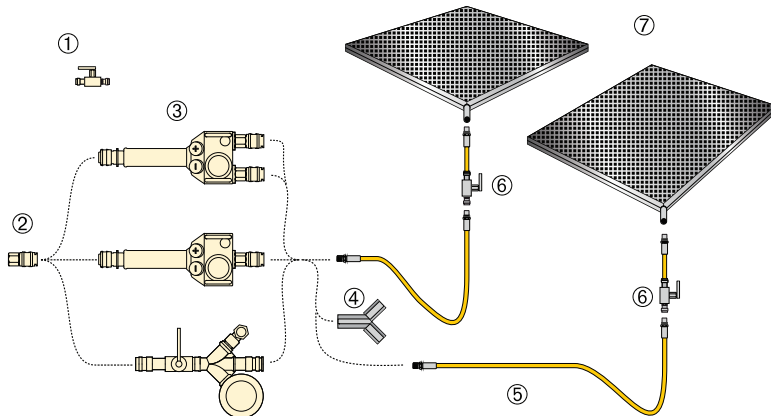

- 1 Adaptor Valve
- 2 Adaptor
- 3 Single Push Button Controller
Double Push Button Controller
Simplified Valve Controller
- 4 "Y" Connector for Twin application
- 5 Red Air Hose
Blue Air Hose
Yellow Air Hose
- 6 Shut off unit 1 ft with Hose, and Ball Valve
- 7 Lifting Bags

Lifting Bag Controller

Push Button Controller



1 outlets 1/4"
CPF: ref.67759 - 10 bar
CLT: ref.66907 - 8 bar
CLC: ref.67760 - 1 bar

2 outlets 1/4"
CPF: ref.67757 - 10 bar
CLT: ref.66906 - 8 bar
CLC: ref.67758 - 1 bar

Joystick Controller



2 outlets 1/4"
CPF: ref.67752 - 10 bar
CLT: ref.66908 - 8 bar
CLC: ref.67753 - 1 bar

3 outlets 1/4"
CPF: ref.67754 - 10 bar
CLT: ref.67755 - 8 bar
CLC: ref.67756 - 1 bar

Simplified Valve Controller



1 outlets 1/4"
CPF: ref.67761 - 10 bar
CLT: ref.67192 - 8 bar
CLC: ref.67762 - 1 bar

2 outlets 1/4"
CPF: ref.67763 - 10 bar
CLT: ref.67193 - 8 bar
CLC: ref.67764 - 1 bar

Air Hoses



Blue
ref.67179 - 5 m
ref.66901 - 10 m
Red
ref.67180 - 5 m
ref.66902 - 10 m
Yellow
ref.67751 - 5 m
ref.67750 - 10 m

*also available in black

Pressure Relief Valve



ref.66905
- 200 bar / 10 bar